

Rept: 4-A-E

**South Carolina**  
**Department Of Transportation**  
**Road Summary Report By Contract**

11/5/2021 10:04:53 AM

---

|                     |                 |                    |                |                 |          |                 |          |
|---------------------|-----------------|--------------------|----------------|-----------------|----------|-----------------|----------|
| <b>ContractNbr:</b> | <b>20214010</b> | <b>ProposalId:</b> | <b>4460310</b> | <b>Sub Ind:</b> | <b>S</b> | <b>Exp Ind:</b> | <b>E</b> |
|---------------------|-----------------|--------------------|----------------|-----------------|----------|-----------------|----------|

---

|                 |                  |                |              |
|-----------------|------------------|----------------|--------------|
| <b>FileNbr:</b> | <b>44.040800</b> | <b>County:</b> | <b>Union</b> |
|-----------------|------------------|----------------|--------------|

| <u>Miles</u> | <u>Route</u>                         | <u>From</u>          | <u>To</u>            |
|--------------|--------------------------------------|----------------------|----------------------|
| 0.21         | L-0207                               | ( 0.07)Churchill St  | ( 0.28)Hillcrest Dr  |
| 0.80         | S-0195                               | ( 0.00)Spruce St     | ( 0.80)Rice Ave      |
| 0.35         | S-0197                               | ( 0.00)Thompson Blvd | ( 0.35)Springdale Dr |
| 0.40         | S-0198                               | ( 0.00)Springdale Dr | ( 0.40)Thompson Blvd |
| 0.08         | S-0199                               | ( 0.00)Hillcrest Dr  | ( 0.08)Spruce St     |
| 0.18         | S-0205                               | ( 0.00)Springdale Dr | ( 0.18)Churchill St  |
| 0.24         | S-0206                               | ( 0.00)Springdale Dr | ( 0.24)Birchwood Dr  |
| 0.07         | S-0207                               | ( 0.00)Rice Ave      | ( 0.07)Churchill St  |
| 0.18         | S-0501                               | ( 0.00)Pine St       | ( 0.18)Park Dr       |
| 2.51         | <-----Total Mileage for FileNbr----- |                      | <b>44.040800</b>     |

---

|             |                                          |  |                 |
|-------------|------------------------------------------|--|-----------------|
| <b>2.51</b> | <-----Total Mileage for ContractNbr----- |  | <b>20214010</b> |
|-------------|------------------------------------------|--|-----------------|

---

Rept: 4-8-E

**South Carolina**

11/5/2021 10:14:34 AM

**Department Of Transportation****Item Quantities Summary By File**

FileNbr: 44.040800

Total Length(Mi): 2.51

Submit Indicator: S

Cnty: Union

ProjectId: P040800

Export Indicator: E

Contract: 20214010

ProposalId: 4460310


| <b><u>Item #</u></b> | <b><u>Item Description</u></b>   | <b><u>Unit</u></b> | <b><u>Qty</u></b> |
|----------------------|----------------------------------|--------------------|-------------------|
| 1031000              | MOBILIZATION                     | LS                 | 1.000             |
| 1032010              | BONDS AND INSURANCE              | LS                 | 1.000             |
| 1071000              | TRAFFIC CONTROL                  | LS                 | 1.000             |
| 2023000              | REM. & DISP.OF EXIST. PAVEMENT   | SY                 | 125.000           |
| 2033000              | BORROW EXCAVATION                | CY                 | 283.000           |
| 4011004              | LIQUID ASPHALT BINDER PG64-22    | TON                | 353.829           |
| 4012060              | F.DEP.ASPH.PAV.PATCH-6" UNIF.    | SY                 | 4,820.000         |
| 4013990              | MILL.EXIST.ASPH.PVMT.-VARIABLE   | SY                 | 2,830.000         |
| 4030340              | H/M ASPH.SURF.CR. TYPE C         | TON                | 2,930.077         |
| 4030360              | H/M ASPH.SURF.CR. TYPE E         | TON                | 1,139.189         |
| 4037220              | DRIVEWAY PAVING-SURFACE TYPE C   | TON                | 1,510.875         |
| 6021120              | PERM.CONST.SIGNS(GRND.MNTD)      | SF                 | 264.000           |
| 6250005              | 4"WH.BRKN.LINE-GAP EX-F.D.PNT.   | LF                 | 235.000           |
| 6250025              | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT   | LF                 | 452.000           |
| 6271005              | 4" WH.BRKNLINE THERMO -90 MIL.   | LF                 | 235.000           |
| 6271025              | 24" WH SLDLNES THERMO-125 MIL.   | LF                 | 226.000           |
| 6301100              | PERM.YEL.PAV.MARK BI-DIR 4"X4"   | EA                 | 161.000           |
| 7197130              | ADJUST DROP INLET                | EA                 | 1.000             |
| 7204900              | DETECTABLE WARNING MATERIAL      | SF                 | 62.500            |
| 7209000              | PEDESTRIAN RAMP CONSTRUCTION     | SY                 | 125.000           |
| 7211000              | BITUMINOUS CURB                  | LF                 | 240.000           |
| 8100102              | PERM. GRASS FOR NON-PERMIT RESUR | ACRE               | 15.690            |

No Records available.

No Records available.

| COUNTY | PROJECT | ROAD NUMBER / NAME                                       |
|--------|---------|----------------------------------------------------------|
| Union  | 4460310 | L-207, S-195, S-197, S-198, S-199<br>S-205, S-206; S-207 |

## Milling at Existing Pavement Joints or Bridges

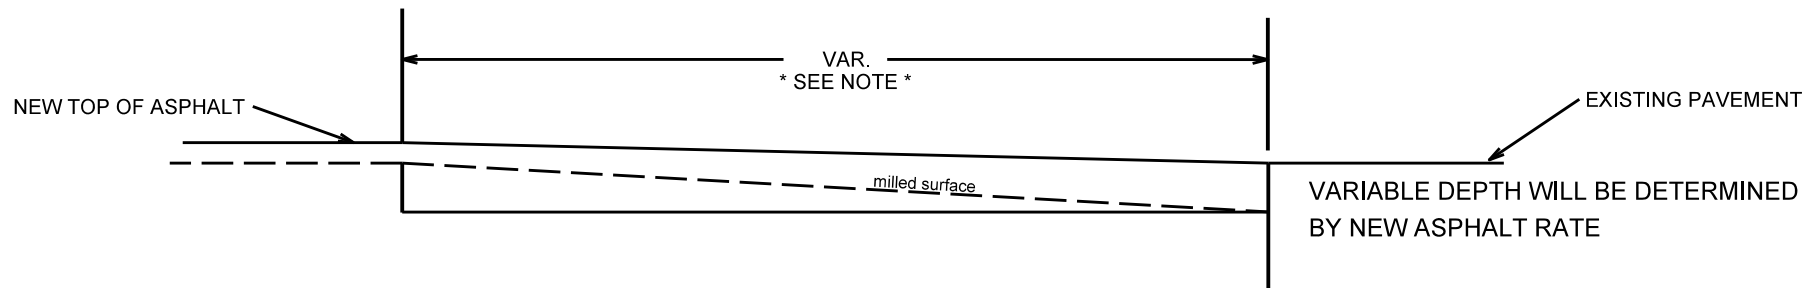

**MILL EXISTING ASPHALT PAVEMENT  
(VARIABLE)**

**MILLING LENGTH IS TO BE CALCULATED AS 25' PER 1"  
OF ASPHALT ENTIRE WIDTH OF ROADWAY**

**P040800 Special Provisions**

- See individual sections for additional notes.
- Access to all driveways will be maintained throughout the project.
- Driveways are to be paved back to SCDOT Right of Way. RCE may adjust paving limits as necessary.
- Stop bars to be marked at stop controlled intersection a distance 4-10' back from the through lane unless otherwise directed.
- Permanent Vegetation will be performed within 7 calendar days of placing borrow to prevent erosion.

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:34:13 PM

|                          |       |                          |              |                    |           |
|--------------------------|-------|--------------------------|--------------|--------------------|-----------|
| <b>Road:</b>             | L-207 | <b>Road Name:</b>        | Birchwood Dr | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.21         | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E            | <b>ContractId:</b> | 20214010  |
|                          |       |                          |              | <b>ProposalId:</b> | 4460310   |

SectionKey: 44L-02070002

ADT: 200

From Route: S-206

To Route: S-198

BMP: 0.07

EMP: 0.28

Miles: 0.21

OrigWidth: 20

WidenLeft: 0

WidenRight: 0

Final Width: 20

Intersections: 2

CommDrwy: 0

ResDrwy: 14


PQI: 1.37

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|---------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---           | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004       | 4011004         | ---          | ---          |
| Qty:  | 13.583         | 1.607        | 5.623         | 6.406           | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255           | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220       | 4030360         | ---          | ---          |
| Qty:  | 215.600        | 25.500       | 89.250        | 98.560          | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>        | <u>Quantity</u> | <u>Unit</u> |
|---------------|--------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                   | 1.000           | LS          |
| 1032010       | BONDS AND INSURANCE            | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION              | 24.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22  | 27.219          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.  | 230.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C       | 241.100         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E       | 98.560          | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C | 89.250          | TON         |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4" | 14.000          | EA          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES | 0.150           | ACRE        |

**AA1 - Alternate 1****TWId****AA2 - Alternate 2****TWId****Special Provisions:****Seq   Details**

0001   Width is an average overall width. Contractor is to pave to existing edge of pavement.

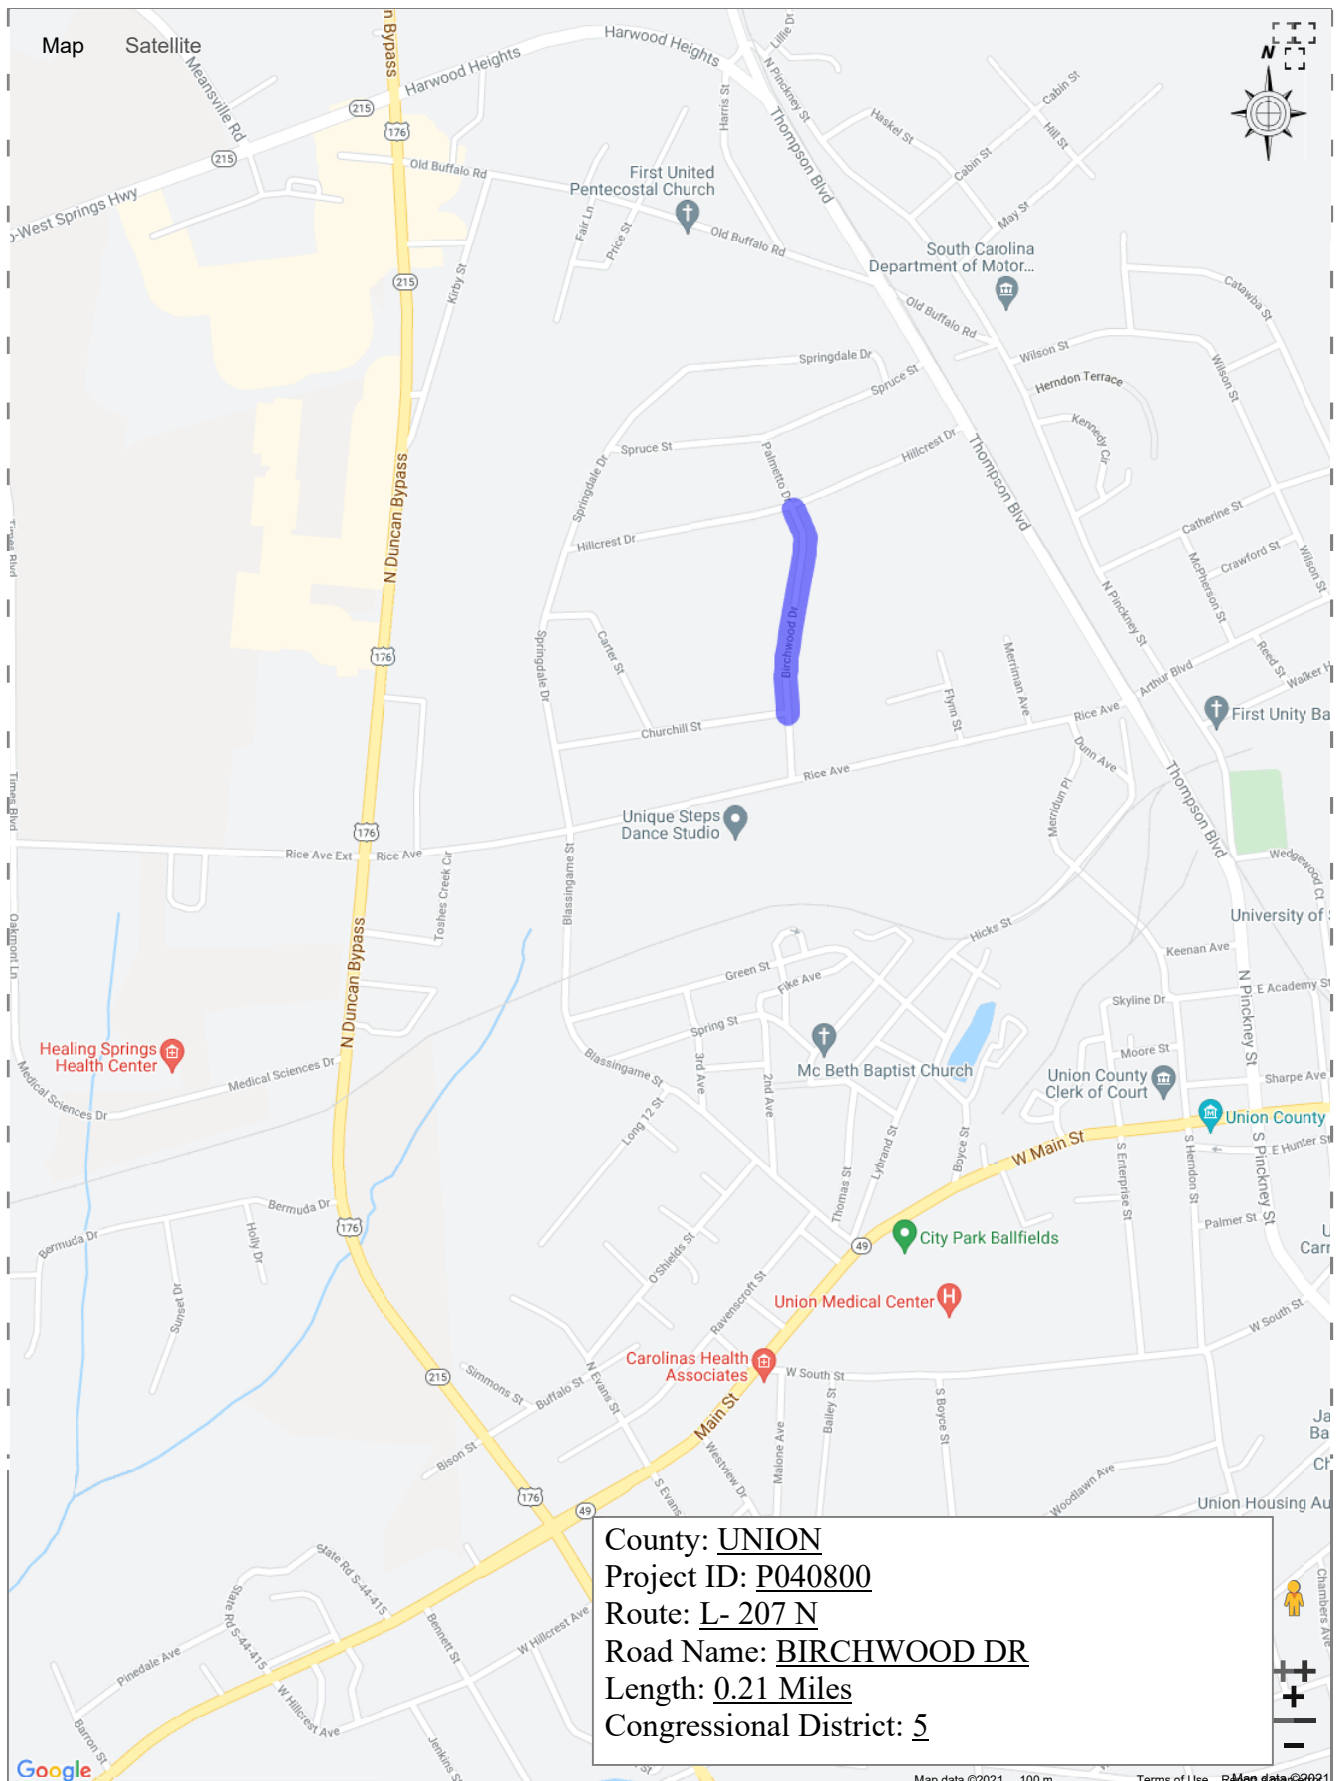

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:34:42 PM

|                          |       |                          |               |                    |           |
|--------------------------|-------|--------------------------|---------------|--------------------|-----------|
| <b>Road:</b>             | S-195 | <b>Road Name:</b>        | Springdale Dr | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.80          | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E             | <b>ContractId:</b> | 20214010  |
|                          |       |                          |               | <b>ProposalId:</b> | 4460310   |

SectionKey: 44S-01950002

ADT: 150

From Route: S-197

To Route: SC 49

BMP: 0.00

EMP: 0.80

Miles: 0.80

OrigWidth: 19

WidenLeft: 0

WidenRight: 0

Final Width: 19

Intersections: 6

CommDrwy: 4

ResDrwy: 66


PQI: 2.23

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 49.157         | 4.820        | 29.399       | 23.185          | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255          | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 780.267        | 76.500       | 466.650      | 356.693         | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>        | <u>Quantity</u> | <u>Unit</u> |
|---------------|--------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                   | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION              | 90.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22  | 106.561         | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.  | 1,160.000       | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE | 450.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C       | 856.767         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E       | 356.693         | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C | 466.650         | TON         |
| 6021120       | PERM.CONST.SIGNS(GRND.MNTD)    | 72.000          | SF          |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT. | 35.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT | 62.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL. | 35.000          | LF          |
| 6271025       | 24" WH SLDLNES THERMO-125 MIL. | 31.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4" | 54.000          | EA          |
| 7211000       | BITUMINOUS CURB                | 150.000         | LF          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES | 0.590           | ACRE        |

**AA1 - Alternate 1****TWld****AA2 - Alternate 2****TWld****Special Provisions:****Seq Details**

- 0001 Width is an average overall width. Contractor is to pave to existing edge of pavement.
- 0002 Bituminous Curb is intended to be placed at 207 Springdale Dr.

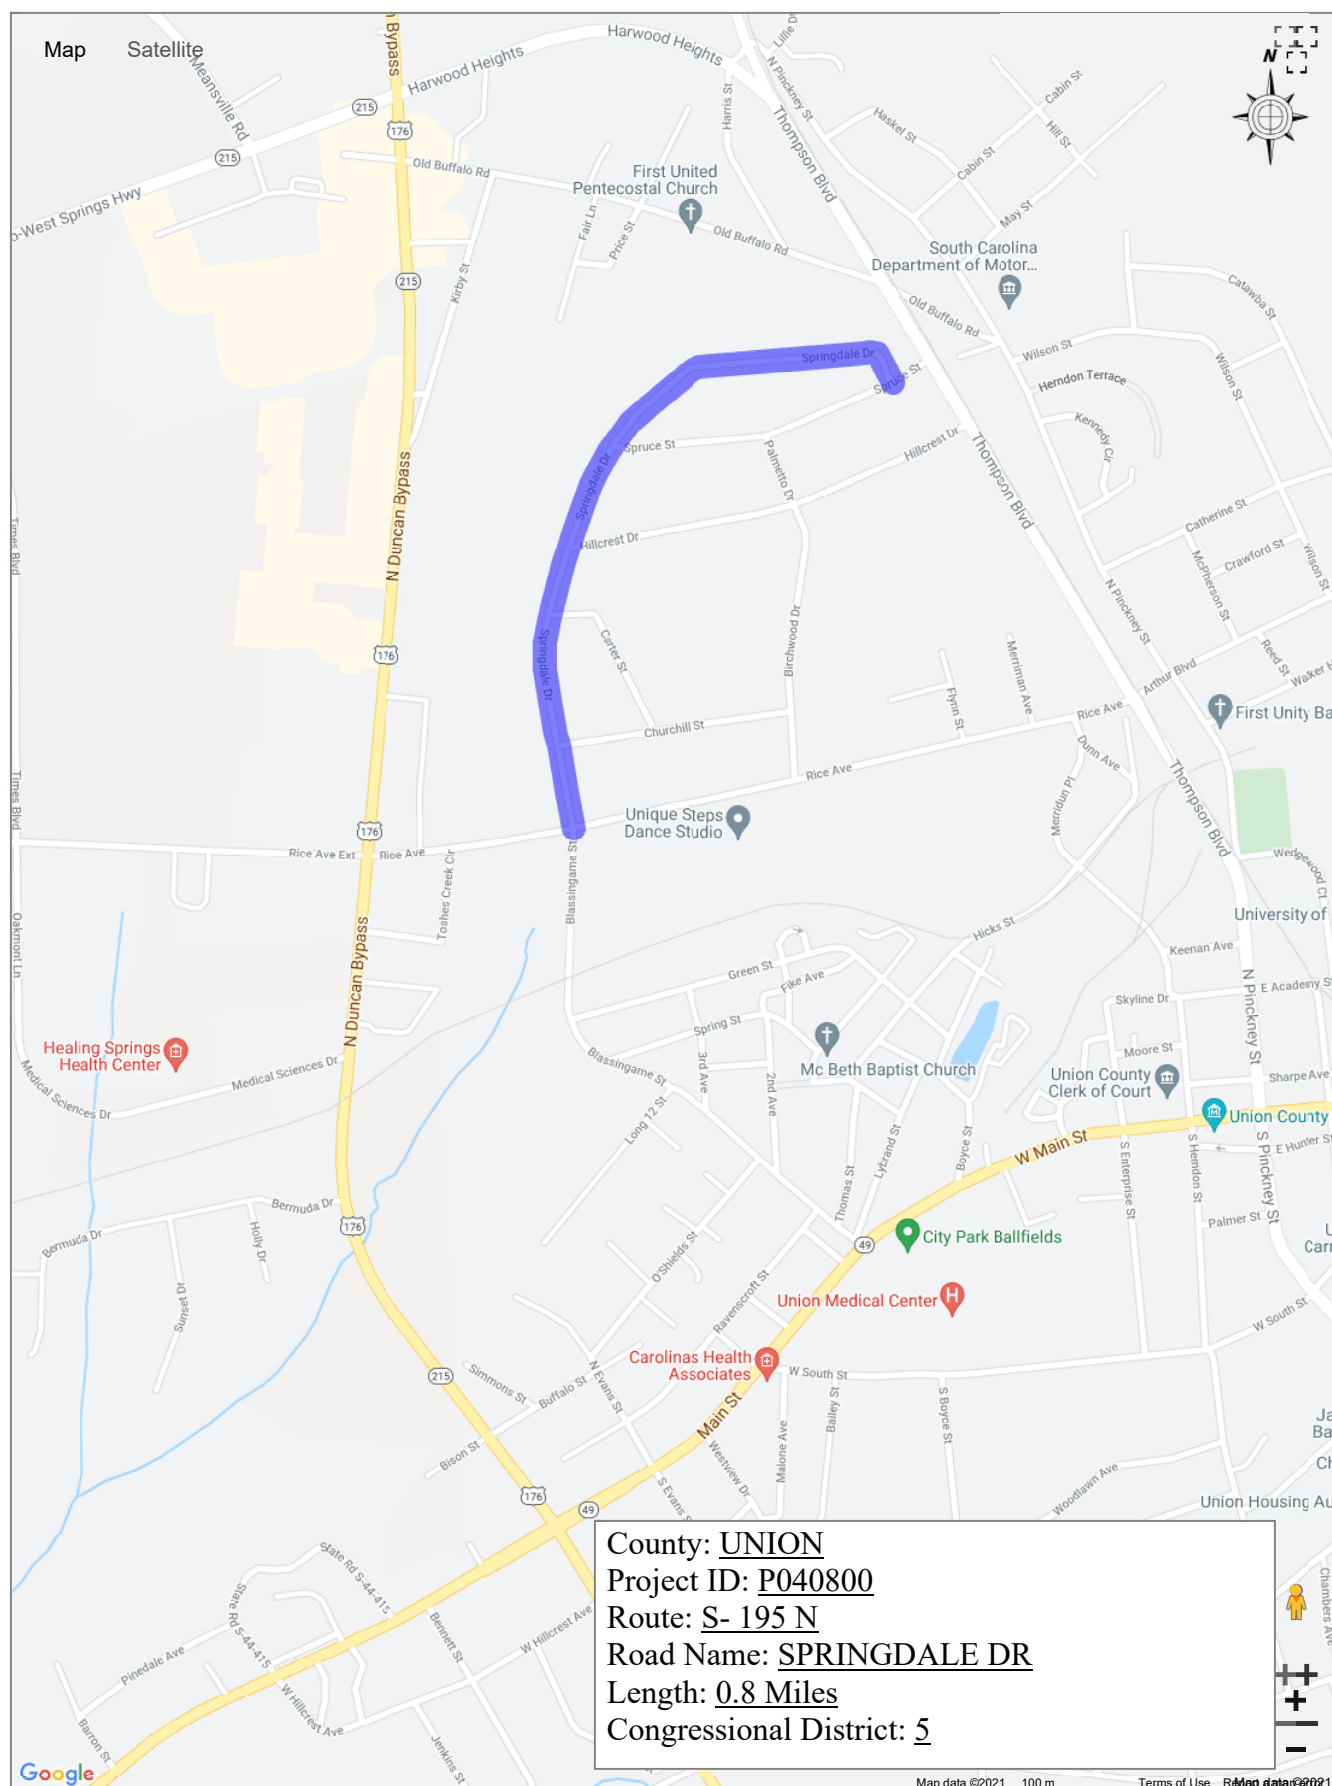

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:35:11 PM

|                          |       |                          |           |                    |           |
|--------------------------|-------|--------------------------|-----------|--------------------|-----------|
| <b>Road:</b>             | S-197 | <b>Road Name:</b>        | Spruce St | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.35      | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E         | <b>ContractId:</b> | 20214010  |
|                          |       |                          |           | <b>ProposalId:</b> | 4460310   |

|                       |              |                   |       |                     |      |
|-----------------------|--------------|-------------------|-------|---------------------|------|
| <b>SectionKey:</b>    | 44S-01970002 | <b>ADT:</b>       | 250   |                     |      |
| <b>From Route:</b>    | SC 18        | <b>To Route:</b>  | S-195 |                     |      |
| <b>BMP:</b>           | 0.00         | <b>EMP:</b>       | 0.35  | <b>Miles:</b>       | 0.35 |
| <b>OrigWidth:</b>     | 19           | <b>WidenLeft:</b> | 0     | <b>WidenRight:</b>  | 0    |
|                       |              |                   |       | <b>Final Width:</b> | 19   |
| <b>Intersections:</b> | 4            | <b>CommDrwy:</b>  | 3     | <b>ResDrwy:</b>     | 33   |
|                       |              |                   |       | <b>PQI:</b>         | 1.28 |

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 21.506         | 3.213        | 15.422       | 10.143          | 0.000        | 0.000        |
|       |                |              |              |                 |              |              |
| Rate: | 175            | 255          | 255          | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 341.367        | 51.000       | 244.800      | 156.053         | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>         | <u>Quantity</u> | <u>Unit</u> |
|---------------|---------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                    | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                 | 1.000           | LS          |
| 2023000       | REM. & DISP.OF EXIST. PAVEMENT  | 75.000          | SY          |
| 2033000       | BORROW EXCAVATION               | 40.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22   | 50.284          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.   | 980.000         | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE  | 420.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C        | 392.367         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E        | 156.053         | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C  | 244.800         | TON         |
| 6021120       | PERM.CONST.SIGNS(GRND.MNTD)     | 24.000          | SF          |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT.  | 25.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT  | 60.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL.  | 25.000          | LF          |
| 6271025       | 24" WH SLDLINES THERMO-125 MIL. | 30.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4"  | 25.000          | EA          |
| 7204900       | DETECTABLE WARNING MATERIAL     | 37.500          | SF          |
| 7209000       | PEDESTRIAN RAMP CONSTRUCTION    | 75.000          | SY          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES  | 0.250           | ACRE        |

---

**AA1 - Alternate 1**

**TWld**

---

**AA2 - Alternate 2**


**TWld**

---

**Special Provisions:**

**Seq   **Details****

0001   Width is an average overall width. Contractor is to pave to existing edge of pavement.



Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:35:45 PM

|                          |       |                                |                             |
|--------------------------|-------|--------------------------------|-----------------------------|
| <b>Road:</b>             | S-198 | <b>Road Name:</b> Hillcrest Dr | <b>FileNbr:</b> 44.040800   |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> 0.40  | <b>ProjectId:</b> P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> E     | <b>ContractId:</b> 20214010 |
|                          |       |                                | <b>ProposalId:</b> 4460310  |

|                       |              |                        |                        |
|-----------------------|--------------|------------------------|------------------------|
| <b>SectionKey:</b>    | 44S-01980002 | <b>ADT:</b> 250        |                        |
| <b>From Route:</b>    | S-195        | <b>To Route:</b> SC 18 |                        |
| <b>BMP:</b>           | 0.00         | <b>EMP:</b> 0.40       | <b>Miles:</b> 0.40     |
| <b>OrigWidth:</b>     | 21           | <b>WidenLeft:</b> 0    | <b>WidenRight:</b> 0   |
|                       |              |                        | <b>Final Width:</b> 21 |
| <b>Intersections:</b> | 4            | <b>CommDrwy:</b> 8     | <b>ResDrwy:</b> 40     |
|                       |              |                        | <b>PQI:</b> 1.39       |

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 27.166         | 3.213        | 21.848       | 12.813          | 0.000        | 0.000        |
|       |                |              |              |                 |              |              |
| Rate: | 175            | 255          | 255          | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 431.200        | 51.000       | 346.800      | 197.120         | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>        | <u>Quantity</u> | <u>Unit</u> |
|---------------|--------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                   | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                | 1.000           | LS          |
| 2023000       | REM. & DISP.OF EXIST. PAVEMENT | 50.000          | SY          |
| 2033000       | BORROW EXCAVATION              | 45.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22  | 65.040          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.  | 1,200.000       | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE | 410.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C       | 482.200         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E       | 197.120         | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C | 346.800         | TON         |
| 6021120       | PERM.CONST.SIGNS(GRND.MNTD)    | 24.000          | SF          |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT. | 25.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT | 70.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL. | 25.000          | LF          |
| 6271025       | 24" WH SLDLNES THERMO-125 MIL. | 35.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4" | 28.000          | EA          |
| 7204900       | DETECTABLE WARNING MATERIAL    | 25.000          | SF          |
| 7209000       | PEDESTRIAN RAMP CONSTRUCTION   | 50.000          | SY          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES | 0.290           | ACRE        |

---

**AA1 - Alternate 1**

**TWld**

---

**AA2 - Alternate 2**


**TWld**

---

**Special Provisions:**

**Seq   **Details****

0001   Width is an average overall width. Contractor is to pave to existing edge of pavement.

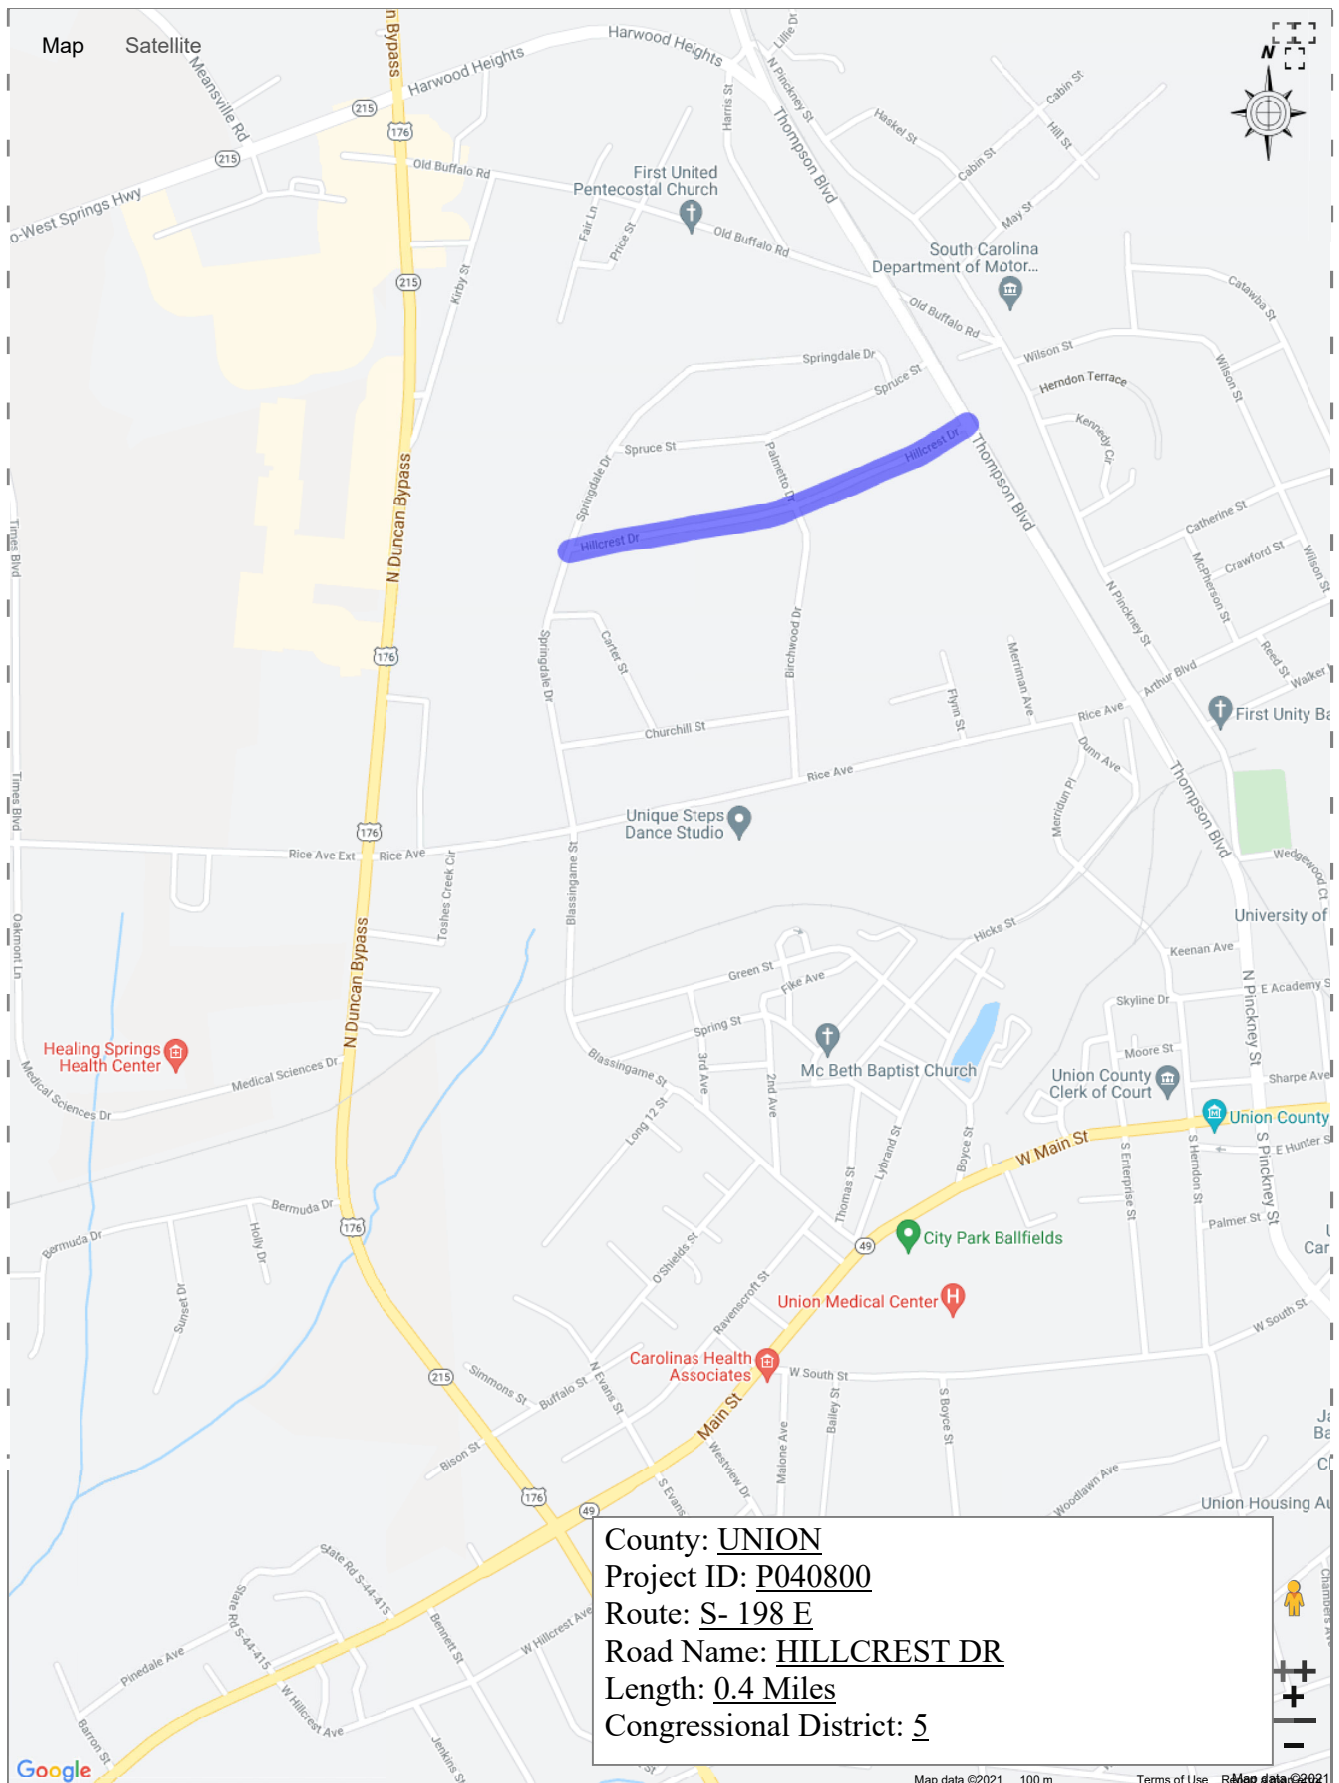

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:36:06 PM

---

|                          |       |                          |              |                    |           |
|--------------------------|-------|--------------------------|--------------|--------------------|-----------|
| <b>Road:</b>             | S-199 | <b>Road Name:</b>        | Birchwood Dr | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.08         | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E            | <b>ContractId:</b> | 20214010  |
|                          |       |                          |              | <b>ProposalId:</b> | 4460310   |

SectionKey: 44S-01990002

ADT: 125

From Route: S-198

To Route: S-199

BMP: 0.00

EMP: 0.08

Miles: 0.08

OrigWidth: 17

WidenLeft: 0

WidenRight: 0

Final Width: 17

Intersections: 2

CommDrwy: 0

ResDrwy: 2


PQI: 1.64

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|---------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---           | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004       | 4011004         | ---          | ---          |
| Qty:  | 4.398          | 1.607        | 0.803         | 2.074           | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255           | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220       | 4030360         | ---          | ---          |
| Qty:  | 69.813         | 25.500       | 12.750        | 31.915          | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>         | <u>Quantity</u> | <u>Unit</u> |
|---------------|---------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                    | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                 | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION               | 9.000           | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22   | 8.882           | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.   | 75.000          | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE  | 260.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C        | 95.313          | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E        | 31.915          | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C  | 12.750          | TON         |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT.  | 25.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT  | 40.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL.  | 25.000          | LF          |
| 6271025       | 24" WH SLDLINES THERMO-125 MIL. | 20.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4"  | 6.000           | EA          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES  | 0.060           | ACRE        |

**AA1 - Alternate 1****TWld****AA2 - Alternate 2****TWld****Special Provisions:****Seq Details**

0001 Width is an average overall width. Contractor is to pave to existing edge of pavement.

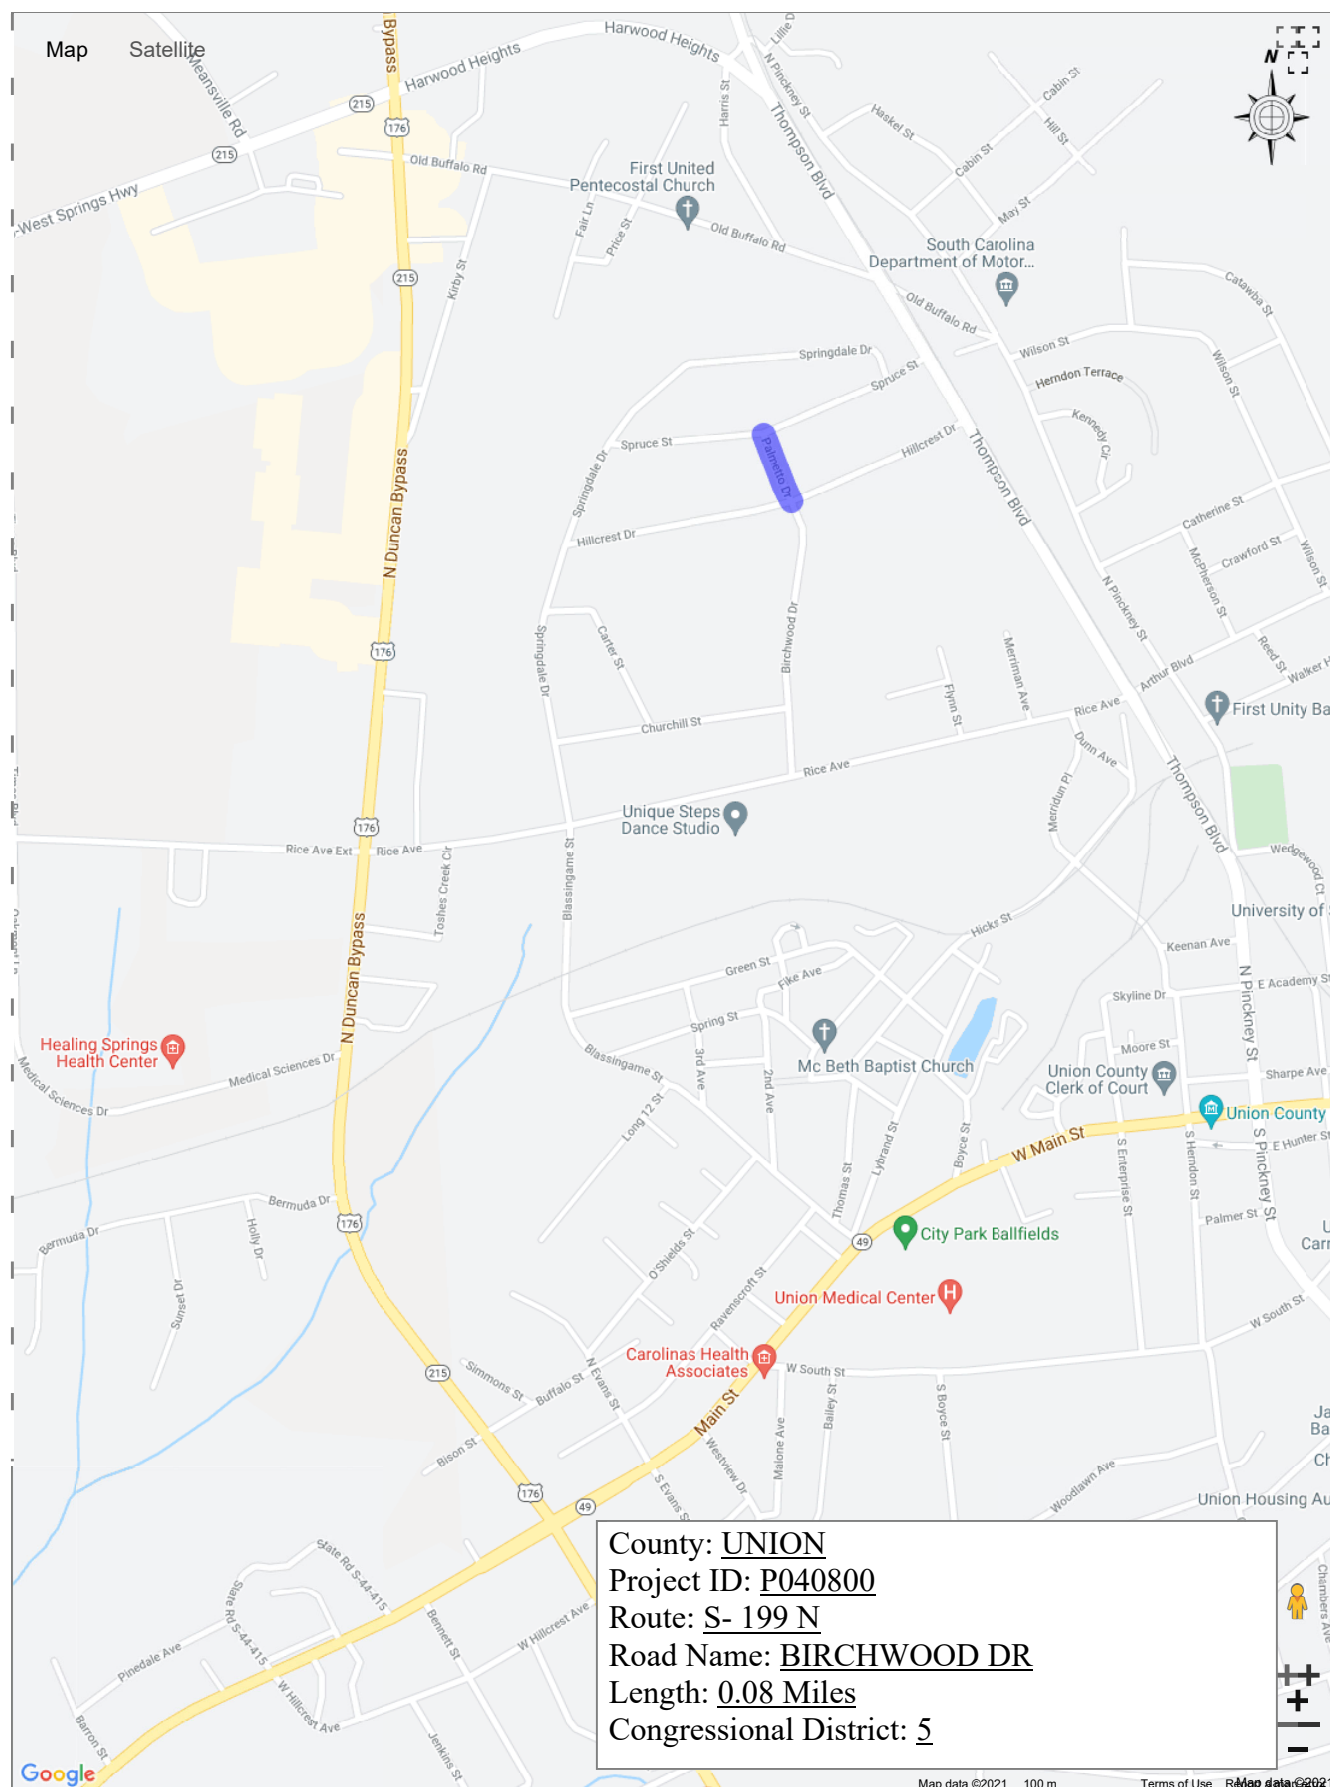

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:36:26 PM

|                          |       |                          |           |                    |           |
|--------------------------|-------|--------------------------|-----------|--------------------|-----------|
| <b>Road:</b>             | S-205 | <b>Road Name:</b>        | Carter St | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.18      | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E         | <b>ContractId:</b> | 20214010  |
|                          |       |                          |           | <b>ProposalId:</b> | 4460310   |

SectionKey: 44S-02050002

ADT: 125

From Route: S-195

To Route: S-206

BMP: 0.00

EMP: 0.18

Miles: 0.18

OrigWidth: 20

WidenLeft: 0

WidenRight: 0

Final Width: 20

Intersections: 2

CommDrwy: 0

ResDrwy: 13

PQI: 1.72

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 11.642         | 1.607        | 5.221        | 3.089           | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255          | 45              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 184.800        | 25.500       | 82.875       | 47.520          | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>         | <u>Quantity</u> | <u>Unit</u> |
|---------------|---------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                    | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                 | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION               | 20.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22   | 21.559          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.   | 225.000         | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE  | 340.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C        | 210.300         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E        | 47.520          | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C  | 82.875          | TON         |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT.  | 35.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT  | 56.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL.  | 35.000          | LF          |
| 6271025       | 24" WH SLDLINES THERMO-125 MIL. | 28.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4"  | 12.000          | EA          |
| 7211000       | BITUMINOUS CURB                 | 25.000          | LF          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES  | 0.130           | ACRE        |

**AA1 - Alternate 1****TWId****AA2 - Alternate 2****TWId****Special Provisions:****Seq Details**

0001 Width is an average overall width. Contractor is to pave to existing edge of pavement.

0002 Bituminous Curb is intended for driveway located at mile point 0.01 station right.



Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:36:51 PM

---

|                          |       |                          |              |                    |           |
|--------------------------|-------|--------------------------|--------------|--------------------|-----------|
| <b>Road:</b>             | S-206 | <b>Road Name:</b>        | Churchill St | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.24         | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E            | <b>ContractId:</b> | 20214010  |
|                          |       |                          |              | <b>ProposalId:</b> | 4460310   |

SectionKey: 44S-02060002

ADT: 200

From Route: S-195

To Route: S-207

BMP: 0.00

EMP: 0.24

Miles: 0.24

OrigWidth: 22

WidenLeft: 0

WidenRight: 0

Final Width: 22

Intersections: 3

CommDrwy: 0

ResDrwy: 21

PQI: 2.01


|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 17.076         | 2.410        | 8.434        | 8.054           | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255          | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 271.040        | 38.250       | 133.875      | 123.904         | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>         | <u>Quantity</u> | <u>Unit</u> |
|---------------|---------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                    | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                 | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION               | 27.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22   | 35.974          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.   | 400.000         | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE  | 350.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C        | 309.290         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E        | 123.904         | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C  | 133.875         | TON         |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT.  | 35.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT  | 80.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL.  | 35.000          | LF          |
| 6271025       | 24" WH SLDLINES THERMO-125 MIL. | 40.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4"  | 17.000          | EA          |
| 7211000       | BITUMINOUS CURB                 | 65.000          | LF          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES  | 0.170           | ACRE        |

**AA1 - Alternate 1****TWId****AA2 - Alternate 2****TWId****Special Provisions:****Seq Details**

0001 Width is an average overall width. Contractor is to pave to existing edge of pavement.

0002 Bituminous Curb is intended for driveways located at mile points 0.02 and 0.08 station right.



Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

6/29/2021 1:37:10 PM

---

|                          |       |                          |              |                    |           |
|--------------------------|-------|--------------------------|--------------|--------------------|-----------|
| <b>Road:</b>             | S-207 | <b>Road Name:</b>        | Birchwood Dr | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.07         | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E            | <b>ContractId:</b> | 20214010  |
|                          |       |                          |              | <b>ProposalId:</b> | 4460310   |

SectionKey: 44S-02070002

ADT: 325

From Route: SC 49

To Route: S-206

BMP: 0.00

EMP: 0.07

Miles: 0.07

OrigWidth: 21

WidenLeft: 0

WidenRight: 0

Final Width: 21

Intersections: 2

CommDrwy: 0

ResDrwy: 3


PQI: 1.37

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|--------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---          | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004      | 4011004         | ---          | ---          |
| Qty:  | 4.754          | 1.607        | 1.205        | 2.242           | 0.000        | 0.000        |
| Rate: | 175            | 255          | 255          | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220      | 4030360         | ---          | ---          |
| Qty:  | 75.460         | 25.500       | 19.125       | 34.496          | 0.000        | 0.000        |

| <u>Item #</u> | <u>Item Description</u>        | <u>Quantity</u> | <u>Unit</u> |
|---------------|--------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                   | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION              | 8.000           | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22  | 9.808           | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.  | 150.000         | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE | 250.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C       | 100.960         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E       | 34.496          | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C | 19.125          | TON         |
| 6021120       | PERM.CONST.SIGNS(GRND.MNTD)    | 48.000          | SF          |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT. | 25.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT | 36.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL. | 25.000          | LF          |
| 6271025       | 24" WH SLDLNES THERMO-125 MIL. | 18.000          | LF          |
| 6301100       | PERM.YEL.PAV.MARK BI-DIR 4"X4" | 5.000           | EA          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES | 0.050           | ACRE        |

**AA1 - Alternate 1****TWId****AA2 - Alternate 2****TWId****Special Provisions:****Seq Details**

0001 Width is an average overall width. Contractor is to pave to existing edge of pavement.

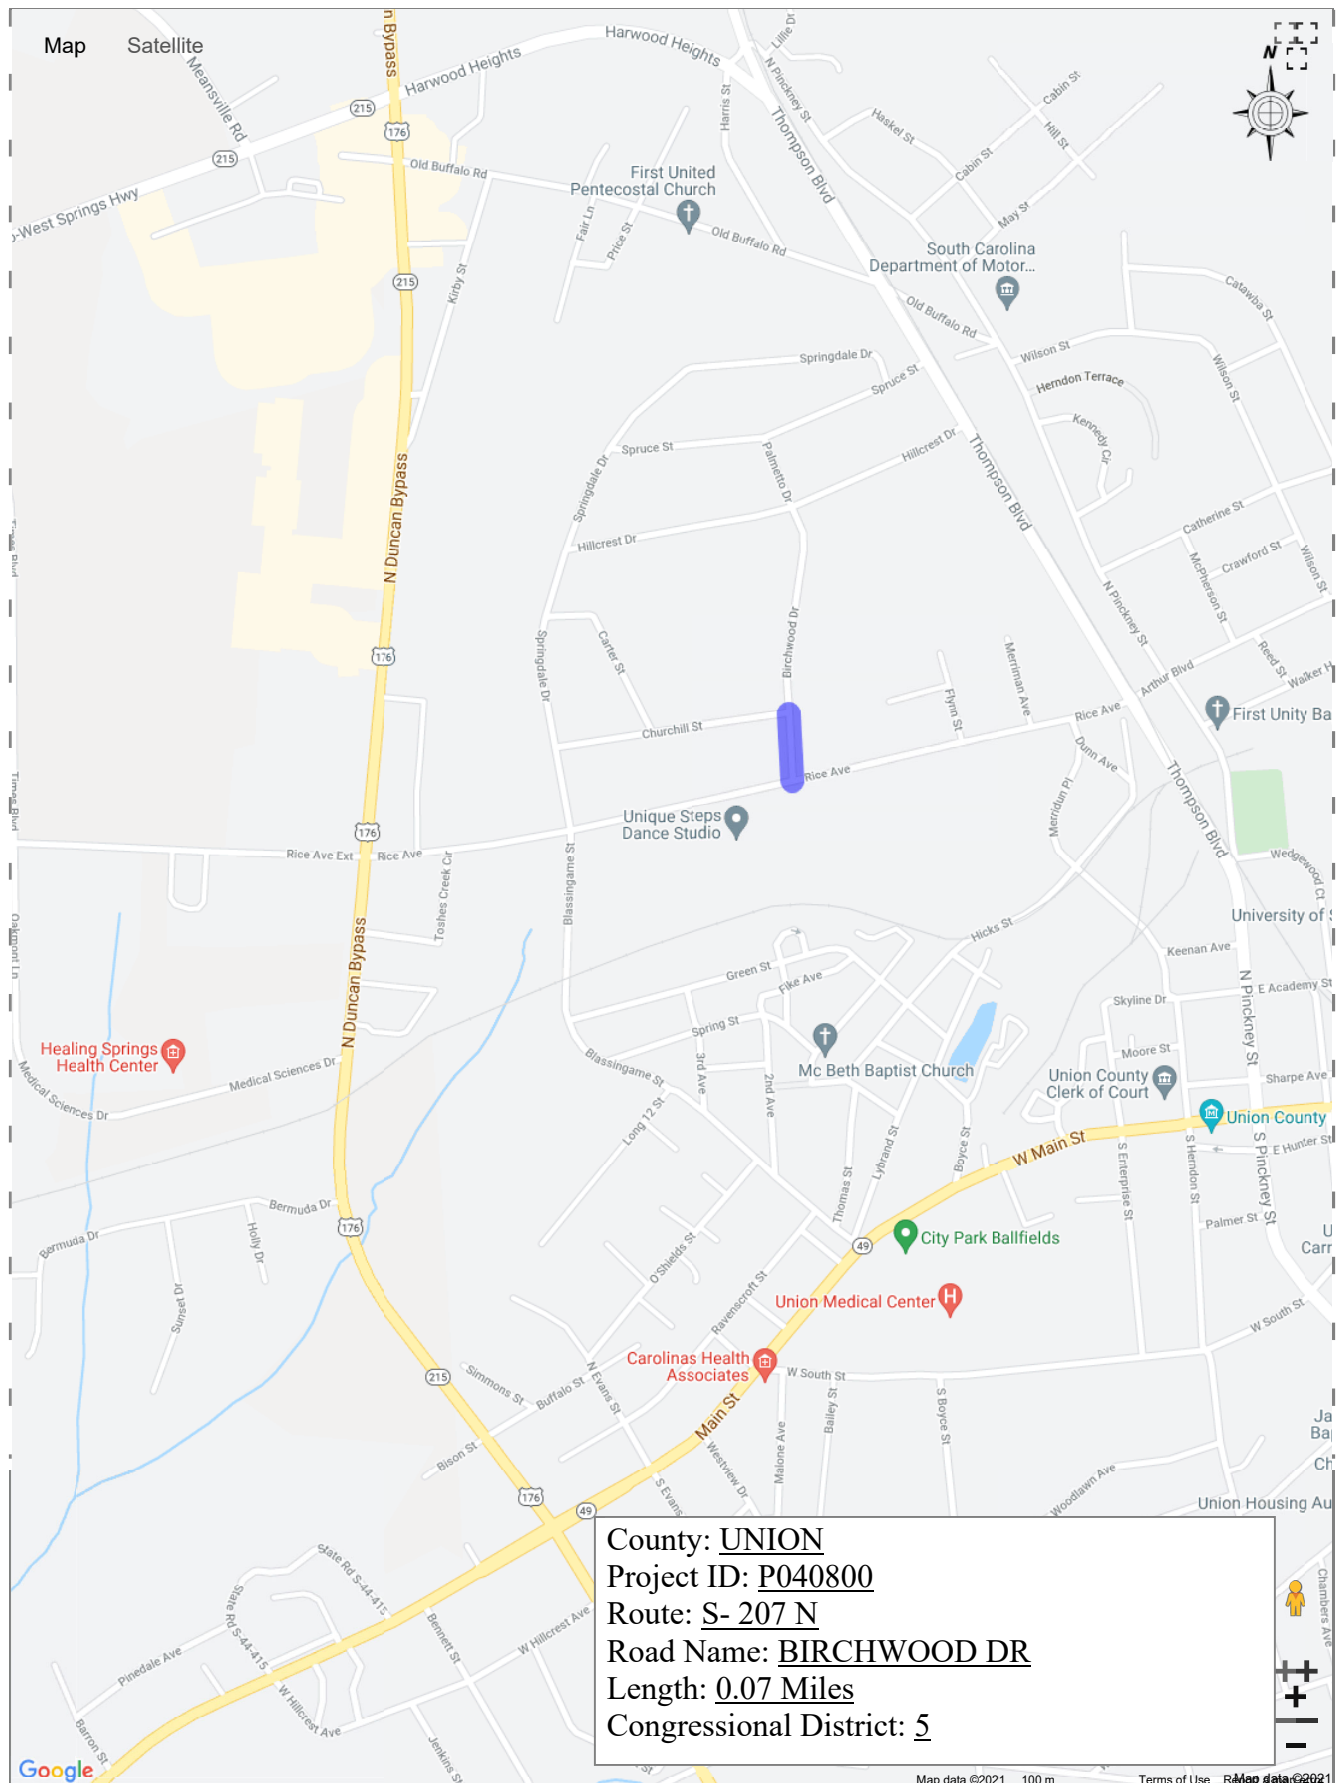

Rept: 4-7-E1

**South Carolina**  
**Department Of Transportation**  
**Individual Section Summary**

11/5/2021 10:15:08 AM

|                          |       |                          |              |                    |           |
|--------------------------|-------|--------------------------|--------------|--------------------|-----------|
| <b>Road:</b>             | S-501 | <b>Road Name:</b>        | Circle Drive | <b>FileNbr:</b>    | 44.040800 |
| <b>County:</b>           | Union | <b>Total Length(Mi):</b> | 0.18         | <b>ProjectId:</b>  | P040800   |
| <b>Submit Indicator:</b> | S     | <b>Export Indicator:</b> | E            | <b>ContractId:</b> | 20214010  |
|                          |       |                          |              | <b>ProposalId:</b> | 4460310   |

**SectionKey:** 44S-05010001 **ADT:** 125  
**From Route:** S-191 **To Route:** S-161  
**BMP:** 0.00 **EMP:** 0.18 **Miles:** 0.18  
**OrigWidth:** 22 **WidenLeft:** 0 **WidenRight:** 0 **Final Width:** 22  
**Intersections:** 2 **CommDrwy:** 0 **ResDrwy:** 18 **PQI:** 2.01

|       | <u>Surface</u> | <u>Inter</u> | <u>Drwwys</u> | <u>Intermed</u> | <u>Level</u> | <u>Widen</u> |
|-------|----------------|--------------|---------------|-----------------|--------------|--------------|
| Rate: | ---            | ---          | ---           | ---             | ---          | ---          |
| Type: | 4011004        | 4011004      | 4011004       | 4011004         | 4011004      | ---          |
| Qty:  | 12.807         | 1.607        | 7.229         | 6.040           | 0.819        | 0.000        |
| Rate: | 175            | 255          | 255           | 80              | ---          | ---          |
| Type: | 4030340        | 4030340      | 4037220       | 4030360         | 4030340      | ---          |
| Qty:  | 203.280        | 25.500       | 114.750       | 92.928          | 13.000       | 0.000        |

| <u>Item #</u> | <u>Item Description</u>        | <u>Quantity</u> | <u>Unit</u> |
|---------------|--------------------------------|-----------------|-------------|
| 1031000       | MOBILIZATION                   | 1.000           | LS          |
| 1071000       | TRAFFIC CONTROL                | 1.000           | LS          |
| 2033000       | BORROW EXCAVATION              | 20.000          | CY          |
| 4011004       | LIQUID ASPHALT BINDER PG64-22  | 28.502          | TON         |
| 4012060       | F.DEP.ASPH.PAV.PATCH-6" UNIF.  | 400.000         | SY          |
| 4013990       | MILL.EXIST.ASPH.PVMT.-VARIABLE | 350.000         | SY          |
| 4030340       | H/M ASPH.SURF.CR. TYPE C       | 241.780         | TON         |
| 4030360       | H/M ASPH.SURF.CR. TYPE E       | 92.928          | TON         |
| 4037220       | DRIVEWAY PAVING-SURFACE TYPE C | 114.750         | TON         |
| 6021120       | PERM.CONST.SIGNS(GRND.MNTD)    | 96.000          | SF          |
| 6250005       | 4"WH.BRKN.LINE-GAP EX-F.D.PNT. | 30.000          | LF          |
| 6250025       | 24"WH.SLD.LNE-STOP/DIA-F.D.PNT | 48.000          | LF          |
| 6271005       | 4" WH.BRKNLINE THERMO -90 MIL. | 30.000          | LF          |
| 6271025       | 24" WH SLDLNES THERMO-125 MIL. | 24.000          | LF          |
| 7197130       | ADJUST DROP INLET              | 1.000           | EA          |
| 8100102       | PERM. GRASS FOR NON-PERMIT RES | 14.000          | ACRE        |

**AA1 - Alternate 1****TWId****AA2 - Alternate 2****TWId****Special Provisions:****Seq Details**

- 0001 Road width is an average overall width. Contractor is to pave to existing edge of pavement.
- 0002 Additional HMA has been included in the leveling column to pave the parking area of 104 Circle Dr.
- 0003 D.I. adjust pay item is intended to adjust the Drop Inlet at 104 Circle Dr due to paving.

